
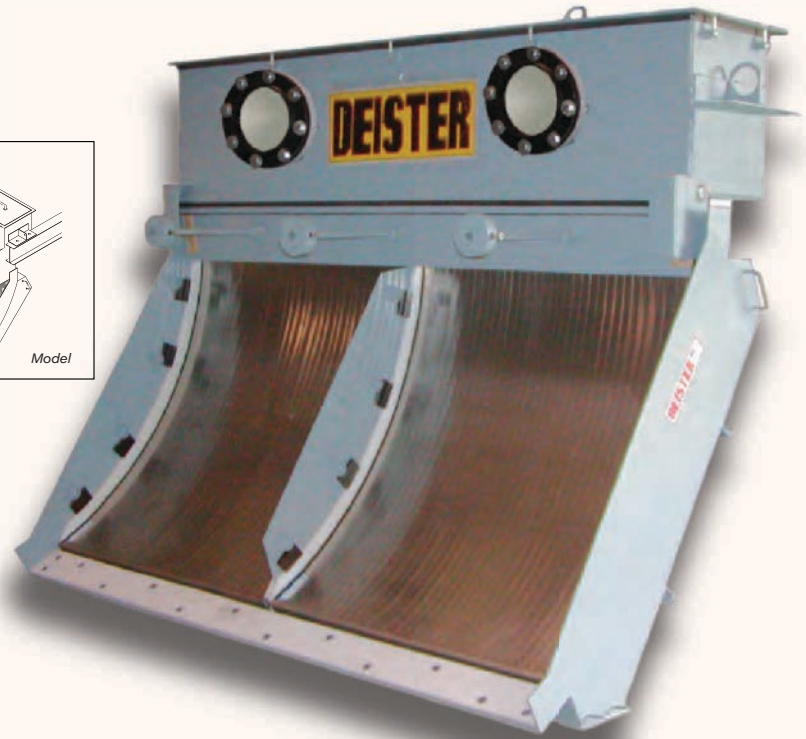


DEISTER SIEVE BEND

The Deister Sieve Bend is the logical choice for low-cost dewatering and classifying applications.

PURPOSE

1. Classify or dewater feed to vibrating screens, relieving overload conditions and improve screen efficiency.
2. Pre- drainage ahead of drain and rinse screen in heavy media cyclone circuits
3. Dewatering (water-only) Cyclone and Spiral Products




The Deister Sieve Bend is designed for many operations.

Available in Various Arcs & Radii

ADVANTAGES

1. Reversible Screen: Permits longer periods of operation and longer screen life.
2. Flexible: A wide variety of sizes and screen panels are available to meet the requirements of most any installation.
3. Available Radii: 30", 40", 61-3/8", and 80"
4. Available Arcs: 45 or 60 degrees

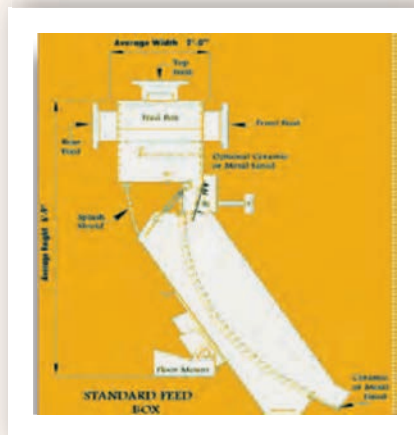

The Deister Sieve Bend is used in various applications in Preparation Plants where coal is wetted and processed.