


# Parts for FlexElex Heaters

## Model "E" Leahy No-Blind Vibrating Screen

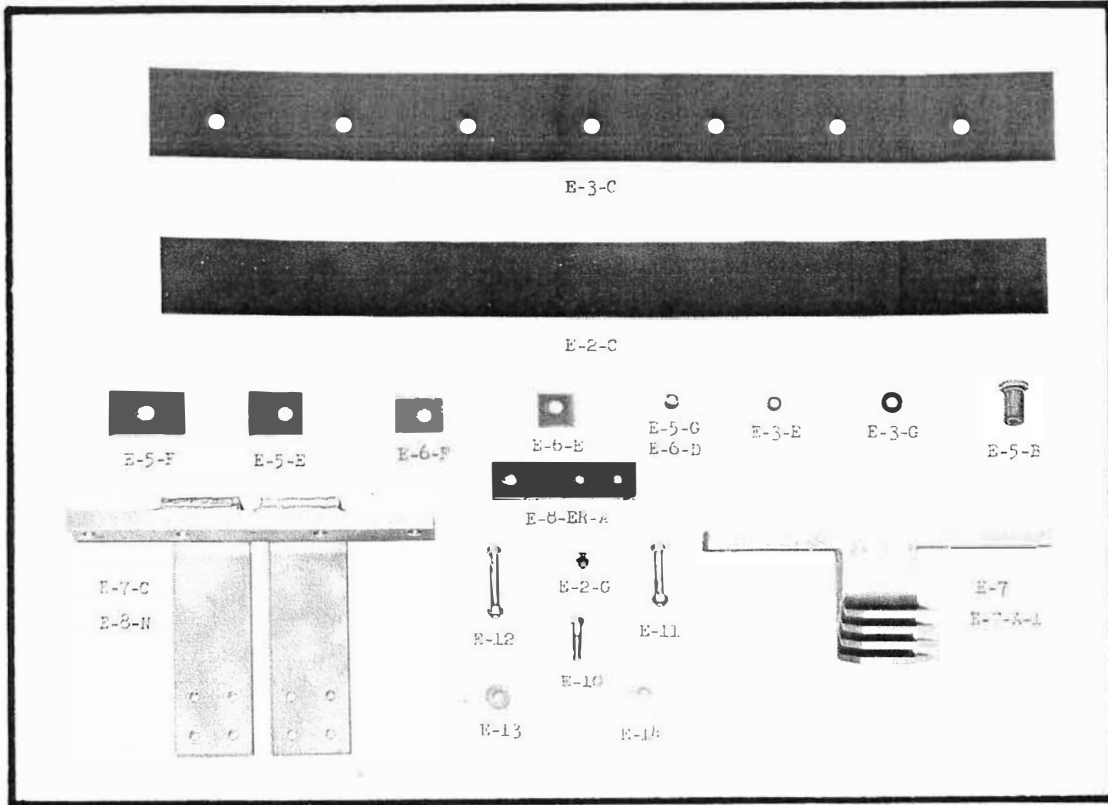


**IMPORTANT!** When ordering parts, give SERIAL NUMBER of your machine. This number is shown on name plate attached to screen vibrator.

Part No.	No. Pcs. Per Screen	Description	Part No.	No. Pcs. Per Screen	Description
E-2-C	1	Fiberglass Insulator Strip for Feed End of Frame (specify screen width).	E-8-ER-A	1	Fibre Support for Bus Bars.
E-2-G	2	1/4" x 5/8" Flat-head Screws with nut and rubber washer for mounting Insulator Strip E-2-C.	E-8-ER-B	1	Angle Bracket for Fibre Support.
E-3-C	1	Fiberglass Insulator Strip for Discharge End of Frame (specify screen width).	E-8-F	1	Fibre Spacer for Dual Screen Heater Bus Bars.
E-3-E	1	Fiberglass Insulator Bushing for Bolts mounting Discharge End Clamp Bar E-3.	E-8-KR	1	Feed End Bus Bars, 4000 amp., individually heated screens (specify screen size).
E-3-G	1	Fiberglass Insulator Washer for Bolts mounting Discharge End Clamp Bar E-3.	E-8-LR	1	Discharge End Bus Bars, 4000 amp., individually heated screens (specify screen size).
E-5-B	2 or 3	Insulator Bushing for Tension Bolt E-5-A.	E-8-M	1	Feed End Bus Bars, Dual Heater, 4000 amp., for a pair of screens (specify screen width).
E-5-E	2	Fiberglass Upper Insulating Washer for J-118-5-EH or J-124-5-EHN Yokes for 5' wide screens.	E-8-MD	1-set	Feed End Bus Bars to double the voltage for Dual Screen Heaters on Stainless Cloth.
E-5-P	2	Fiberglass Lower Insulating Washer for J-118-5-EH or J-124-5-EHN Yokes for 5' wide screens.	E-8-N	2	Feed End Bus Bar Connector, Dual Screen Heaters (specify screen width).
E-6-D	2	Fiberglass Insulating Bushing for 5/8" Bolts for J-118-5-EH or J-124-5-EHN Yokes.	E-8-P	1	Discharge End Bus Bar, Dual Screen Heaters (specify screen width).
E-6-E	2	Fiberglass Upper Insulating Washer for J-118-24-EH or J-124-24-EHN Yokes for 2' to 4' wide screens.	E-8-Q	1	Feed End Bus Bar, for 2 Range Secondary, 3000 amp. (specify screen size).
E-6-P	2	Fiberglass Lower Insulating Washer for J-118-24-EH or J-124-24-EHN Yokes for 2' to 4' wide screens.	E-8-R	1	Discharge End Bus Bar, for 2 Range Secondary (specify screen width).
E-7	2	Bus Bar Connector, 3000 amp.	E-8-S	2	"U" Member Shunt Bar, for 2 Range Secondary.
E-7-A-1	2	Bus Bar Connector, 4000 amp.	E-8-T	1	"U" Member for 2 Range Secondary.
E-7-B	1-set	Discharge End Bus Bar Connector, Double-Surface Screens.	E-9-D-PP	4	Flexible Cable Conductor for Double Surface Screens.
E-7-C	3	Feed End Bus Bar Connector, Double-Surface Screens.	E-9-D-A	1	Fibre Insulator for Flexible Cables.
E-8-DR	1	Feed End Bus Bar, 3000 amp., individually heated screens (specify screen size).	E-10	1	1/2" x 2" Cadmium-plated Hex-head Bolts and Nuts
E-8-ED	1	Fibre Spacer for 2 Range Secondary Heater System.	E-11	1	1/2" x 3" " " " " " " "
E-8-ER	1	Discharge End Bus Bar, 3000 amp., individually heated screens (specify screen size).	E-12	1	1/2" x 5" " " " " " " "
			E-13	1	1/2" Belleville Washers
			E-14	1	1/2" Cad-plated Flat Washers
			E-15-15	2	Rubber Seal for 3000 amp. Bus Bar.
			E-15-20	2	Rubber Seal for 4000 amp. Bus Bar.

DEISTER CONCENTRATOR  
The Original Deister Co., Incorporated 1906

# Parts for Screen Frame

## Model "E" Leahy No-Blind Vibrating Screen

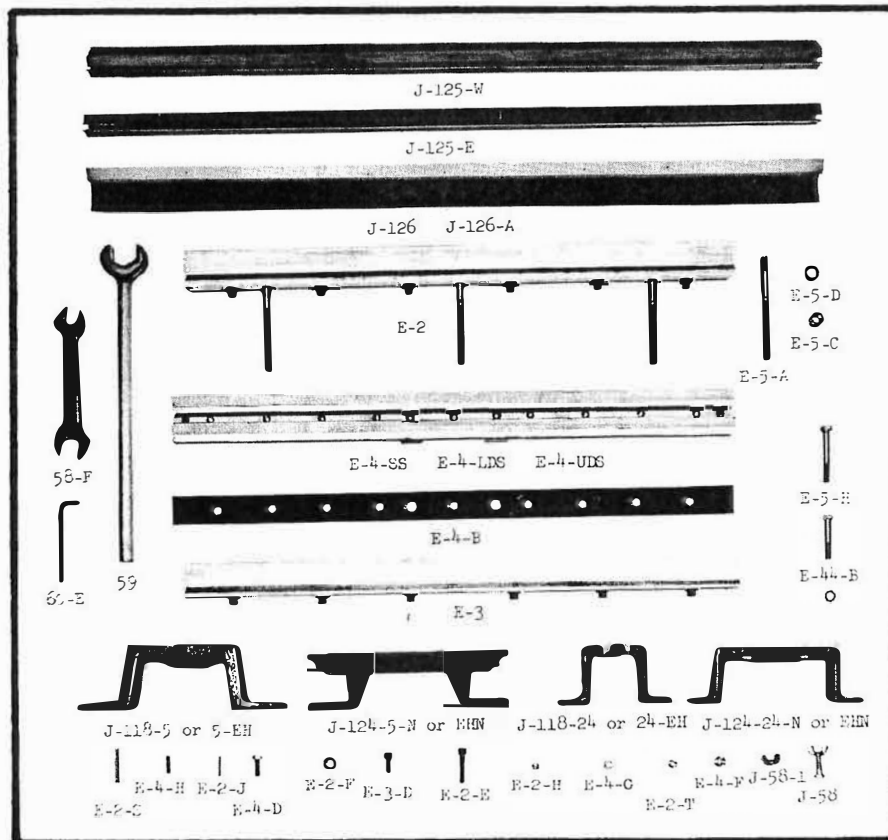

**IMPORTANT!** When ordering parts, give SERIAL NUMBER of your machine. This number is shown on name plate attached to screen vibrator.

Part No.	No. Pcs. Per Screen	Description	Part No.	No. Pcs. Per Screen	Description
E-1-1	1	Main Frame, single-surface screen (specify size).	E-44-B	2	5/8" x 3-1/2" Hex-head Cap Screws for J-118-5 or J-118-24 Yoke.
E-1-2	1	Main Frame, double-surface screen (specify size).	J-58	4 or 6	1/2" x 2" Machine Bolt with Wing Nut for J-125-EC Side Boards.
E-2	1	Feed End Hook Clamp Bars (specify screen width).	J-58-1	4 or 6	1/2" Wing Nuts for 1/2" Bolt.
E-2-E	1	1/2" x 2-1/2" Socket-head Cap Screws for Hook Clamp Bars E-2 or E-3.	J-118-5	1	Yoke, Upper Surface of 5' wide Screen (unheated).
E-2-F	1	Special Flat Washers for E-2-E Cap Screws.	J-118-5-EH	1	Yoke, Upper Surface of 5' wide Screen (heated).
E-2-H	3	1/2" x 1" Helicoll Insert for Hook Clamp Bar E-3.	J-118-24	1	Yoke, Upper Surface of 2', 3', or 4' wide screen (unheated).
E-2-J	2	3/16" x 1-3/4" Spring Pin for Hook Clamp Bar E-2.	J-118-24-EH	1	Yoke, Upper Surface of 2', 3', or 4' wide screen (heated).
E-2-S	2	1/2" x 3" Pressure Spring for Hook Clamp Bar E-2.	J-124-5N	1	Yoke, Lower Surface of 5' wide screen (unheated).
E-2-T	2	1/2" x 1" Self-Tapping Threaded Insert for E-2 & E-3.	J-124-5-EHN	1	Yoke, Lower Surface of 5' wide screen (heated).
E-3	1	Discharge End Hook Clamp Bars (specify screen width).	J-124-24-N	1	Yoke, Lower Surface of 2', 3', or 4' wide screen (unheated).
E-3-D	1	1/2" x 1-1/4" Socket-Head Screws for mounting E-3 Hook Clamp Bar.	J-124-24-EHN	1	Yoke, Lower Surface of 2', 3', or 4' wide screen (heated).
E-4-B	1	Steel Hold Down Strip for Vibrating Beam (specify screen width).	J-125-E	2	Steel Side Board, Case Only (specify screen length).
E-4-D	1	1/2" x 1-1/2" Hex-head Cap Screws for Vibrating Beam.	J-125-W	2	Steel Side Board, Case Only for wet screening applications (specify screen length).
E-4-F	2	5/8" x 1-1/8" Self-Tapping Threaded Insert for Vibrating Beam.	J-125-EC	2	Steel Side Board Complete with J-125-E, J-126 and J-126-A (specify screen length).
E-4-G	2	1/2" x 9/16" Self-tapping Threaded Insert for core of Vibrating Beam.	J-125-WC	2	Steel Side Board Complete with J-125-W, J-126 and J-126-A (specify screen length).
E-4-H	1	3/8" x 1-1/4" Spring Pin for Vibrating Beam.	J-126	2 pcs.	Rubber Side Strip for Steel Side Board J-125-E (specify screen length).
E-4-SS	1	Vibrating Beam for Single-Surface Screens (specify screen width).	J-126-A	2 pcs.	Wood Strip for J-125-E and J-126 (specify screen length).
E-4-LDS	1	Vibrating Beam for Lower Surface of Double-Surface Screens (specify screen width).	58-F	1	Wrench for 3/4" and 1" nuts.
E-4-UDS	1	Vibrating Beam for Upper Surface of Double-Surface Screens (specify screen width).	59	1	Wrench for Screw-Jack Tilting Mechanism.
E-5-A	2 or 3	Tension Bolt, 3/4" x 9" Stud Bolt.	60-E	1	Wrench for 1/2" Socket-head Cap Screws.
E-5-C	2 or 3	3/4" Hex. Nut for E-5-A Tension Bolt.			
E-5-D	2 or 3	Special 3/4" Flat Washer for E-5-A Tension Bolt.			
E-5-H	2	5/8" x 5" Hex. Head Cap Screw for J-124-5N or J-124-5-EHN Yoke.			

**DEISTER CONCENTRATOR**  
The Original Deister Co., Incorporated 1906