

QUAD 9 CONCENTRATING TABLE



MORE CAPACITY. SAME FOOTPRINT AND RELIABILITY.



FEATURES & SPECIFICATIONS

- **Total Feed Rate:** 1.6 MTPH (44 μm) to 9.2 MTPH (2000 μm)
- **Two Specialty Riffling Systems:**
 - Slime (44 μm)
 - Sand (2000 μm)
- **Power Required:** 3 HP
- **Hand Orientation:** Right or Left
- Proprietary counter rotating differential head motion
- **Ceiling Height Required:** 3.8 M
- **Floor Space Required:** 2.5 M x 7 M
- Each deck is individually adjustable
- Easily adjustable end elevation and side tilt
- Polyethylene launder system

Recognized around the world as the most highly-developed wet concentrating tables available.




RIFFLING SYSTEMS

- Sand
- Slime
- Take-Off Riffle Systems
- Customer-Requested Systems Available

RHOMBOIDAL SHAPE

This unique shape allows for higher grades and increased recoveries. This translates into greater profits for Deister customers.

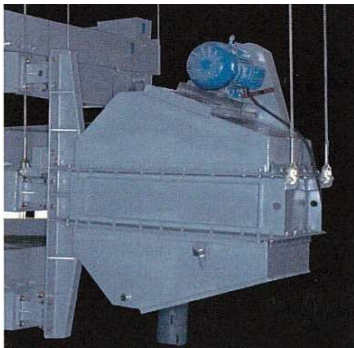

DRIVING MECHANISM

Our Head Motions produce a differential motion allowing for a more efficient recovery process. This distinguishes Deister from less efficient bumping motion type tables.

LAUNDERS

- Made from molded HDPE
- Easily adjustable cutting pans
- Profile design allows for excellent visibility to assure increased recoveries
- The first operator-friendly launder system
- Also can be supplied in stainless steel

